

## Illuminating facts about the HyLite LED Intigo Lamp Better for your eyes, better for the planet.

What makes the HyLite LED Intigo Lamp  
your lighting solution of choice?

- Versatile: Ideal Replacement for HID, HPS or CFL Lamps in new or existing Fixtures. Suitable for fully Enclosed Fixtures
- Easy Installation & Retrofitting: Simply bypass Ballast and Screw-in
- High Lumen Efficacy of 140 lpw - ideal for Low Bay, Canopy, Post Tops, Garage Lights, Security, Decorative and Street Lights
- Flexible Mounting: Can be Mounted with Base Up, Down or Sideways.
- Ingress Protection: IP65. Complete Protection against Contact, Dust Infiltration, and Water Splashes. Shatter-proof Optical Lenses
- Ultra-Long Design Life: Up to 60,000 hours\*. Up to 14 years at an on-time of 12 hrs./day or up to 17 years at an on-time of 10 hrs./day. Eliminate the hassle of repeated relamping.  
*(\*Depending upon the ambient temperature of the installation location)*
- Solid-State: High-Shock and High-Vibration Resistant
- Patented Passive Cooling Design: No Moving Parts for Longer Life
- Instant Start & Restart: No warm up time required even in Extreme Cold
- Wide Ambient Operating Temp. Range: -40°F to +131°F [-40°C to +55°C]
- Fully Encapsulated with Heat and Impact Resistant, UV Protected, Non-yellowing, Optical grade PC Lens
- Flicker-free, Crisp, Pleasing Light showing True Colors
- Enhances Vision: Zero Dark Spots for greater Visibility & Safety
- No Noise or RF Interference. No UV Emissions: Does Not attract Insects
- Radiation/Emissions-Free: No Harmful IR, No RFI, EMI or HD
- Patented Technology Delivers Maximum, Lifetime Energy Savings
- Low Total Cost of Ownership. Zero Maintenance Costs. Shortest Payback Period and High ROI
- 5-Year Warranty

Suitable for  
Damp Locations Enclosed Fixtures

SAVE UP TO  
**78%**  
ON YOUR  
ENERGY COSTS



### Proprietary Technology Reduces:

- Energy Costs
- Bulb and Ballast Replacement Costs
- Re-Lamping and Lamp Disposal Issues
- Costly Equipment Rental
- Pollution: No Mercury, Lead or Toxic Gases Contamination

98%  
RECYCLABLE




**NO**  
LEAD, MERCURY, TOXIC  
GASES OR HEAVY METALS


HyLite High Performance LED Intigo Lamps - Up to 60,000 hour\* Rated Design Life. Outstanding Quality of Light with Energy Savings of 85% over Incandescent, 78% over HID Lamps and 60% over CFL.



### Recommended Applications

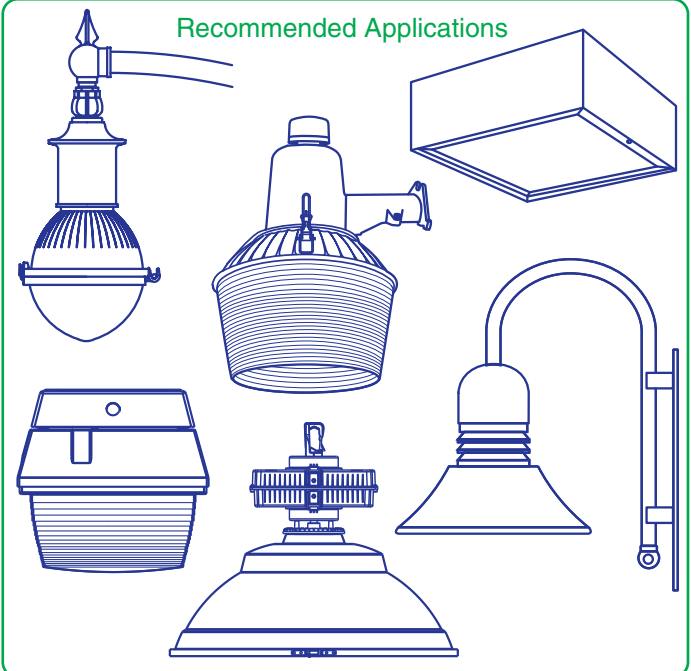

<b>Beam Angle</b>  <b>145°</b> Uniform & Even	<b>Suitable</b>  ✓OK For Enclosed Luminaires	<b>Low Power</b>  & Longer Life Up to 60,000 Hours	<b>Energy Costs</b>  Reduction of up to 88%	<b>Solid State</b>  Vibration and Shock Resistant	<b>No EMI / RFI</b>  Zero Interference	 No IR / UV  No Noise Radiation-Free No Humming	<b>High Efficacy</b>  140 LpW LM-79 Tested	<b>Reliability</b>  x 1,000,000 LM-80 Tested ISTMT Tested	<b>Warranty</b>  <b>5 Years</b> Safe and Reliable
--	---	---	---	---	--	--	---	---	--



**\* Now Available in 347V and 480V too!**





HyLite Lamp	Delivered Lumens	Maximum Install Height	Equivalent to / Energy Savings (%)*		
			Incandescent Bulb	HID, MH & HPS Lamp	CFL Lamp
40W	5680	<20 ft. (6m)	275W (85%)	175W (77%)	100W (60%)
55W	7785	<26 ft. (8m)	450W (88%)	250W (78%)	175W (69%)

\* Does not include Ballast Loss, Maintenance, Replacement Lamp Savings and Disposal Costs which amount to an additional Savings of 30-50%!

Ideal for high-quality illumination in:

- High Ceilings
- Street Lighting
- Canopy Lights
- Security Lighting
- Walkway Lighting
- Dusk-to-Dawn Fixtures
- Accent Lighting
- High Bay Lighting
- Down Lights
- Barn Lights
- Site Lighting
- Parking Garage Lights
- Pendant Lights
- Track Lighting
- Freezer & Cold Storage Lights
- Decorative Lighting
- Driveway Lighting
- Explosion-proof Fixtures

### 40W Dimensions

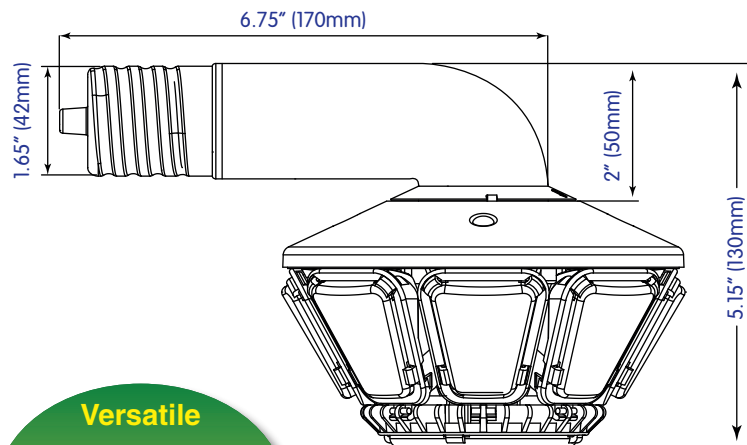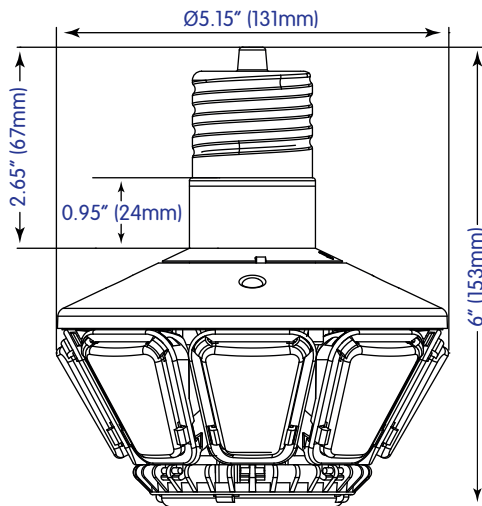

### Versatile

Ideal for either Horizontal or Vertical Mounting Position

\*\*Arm included

### 55W Dimensions

