
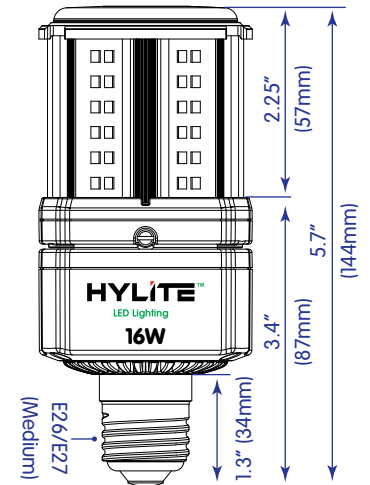


High Performance LED Omni-Cob Lamp, 16W


Small, Compact, High-Performance Omni-Directional LED Lamps are the ideal energy-efficient replacement for existing Incandescent, CFL, HPS and MH Lamp installations in a variety of applications. They are excellent for applications requiring 360° illumination. They feature Excellent Optics for increased Visibility and Security with an Omni-Directional beam to evenly illuminate the area.

- Extremely Efficient: High Lumen Efficacy: 150 LpW
- Fully Encapsulated and Compact Size: Allows placement in Small Fixtures and Tight spaces
- Omni-Directional with Optimized Lighting Beam provides Maximum 360° Luminance to Targeted Area
- Easy Installation: No Ballast necessary. Direct Retrofit into E26 Base Fixtures
- Instant Start and Restart: No Warm-up time required
- Heat & Impact Resistant, UV Protected, Non-Yellowing, Optical Grade Lens
- Good Heat Dissipation with Proprietary-designed Heat Sink
- Cool Operation: Does not add to Heat-Load (up to 90% less heat than Incandescent) while producing Brilliant Light
- Safe and Reliable: Isolated Circuit Design
- Maintenance-free Operation: Lasts up to 50~60 times Longer than Incandescent Lamp. Lowers Costs by Reducing Relamp Frequency
- No Electro-Magnetic (EMI) or Radio Frequency Interference (RFI)
- Ingress Protection: IP64. Complete Protection against Contact, Dust Infiltration, and Splashed Water
- Safe: Contain No Hazardous Materials; RoHS Compliant: No Lead, Mercury, Toxic Metals or Arsenic Gases. No Disposal requirements. Facilitates LEED® points.
- Ideal for use with Renewable Energy Resources – Solar & Wind Power
- Environmentally Friendly: 98% of the HyLite LED Lamp is Recyclable

Mercury
Free



NEXGEN
PRODUCTS

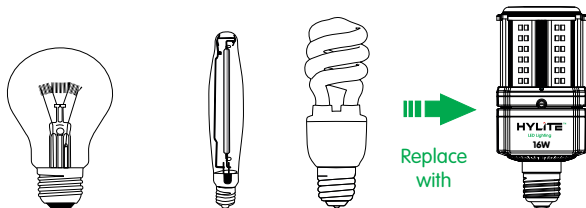

Incandescent	HPS/HID	CFL	HyLite
160W	70W	48W	16W
90%	77%	67%	Energy Savings (%)*

* Does not include Ballast Loss, Maintenance and Replacement Lamp Savings and Disposal Costs which can amount to additional Savings of 30~50%!



NO
LEAD, MERCURY,
HEAVY METALS
OR TOXIC GASES

Universal Burning Positioning



Lamp can be oriented in any position
- does not affect or diminish the life of the Lamp




360°
Illumination



For Enclosed
Luminaires



Reduction of
up to 90%




Up to
60,000 Hours




150 LpW
LM-79 Tested




Radiation-Free
No Humming



Zero
Interference



Vibration and
Shock Resistant



LM-80 Tested
ISTMT Tested



Safe and
Reliable


Model No.	Watts	Delivered Lumens	Maximum Install Height	Input Line Current	Base Type	Dimensions & Weight (each)		
						Diameter	Height	Weight
HL-OC-16W-E26	16	2429	13~16 ft. (4~5m)	58~160mA	E26/E27 (Medium)	2.65" (67mm)	5.7" (144mm)	13 oz. (360g)

- Minimum Lamp Compartment Dimensions for Enclosed Fixtures: 6" x 6" x 8.5" (152mm x 152mm x 216mm)
- To Prevent early Lamp Failure, Lamp should only be installed in Operating Environments ranging from a Minimum of -40°C (-40°F) to a Maximum of +55°C (131°F)
- Efficacy: 150 LpW
- CRI: >80
- Beam Angle: 360°
- Max. THD (%): <20%
- Universal Input Voltage
- Power Factor: >0.9
- Protection: IP64
- Rated Life: 50~60,000 Hrs.
- Warranty: 5 Years
- 100~277V, AC 50/60 Hz.
- 347V, 480V Available with External Step-Down Transformer only. Please see HL-DT-30VA-480-240V Spec. Sheet at: <https://hyliteledlighting.com/resources/specification-sheets/>
- CCT: 5000°K~5500°K for greater visibility. Products with 2400°K~6500°K (CCT) are available as "Special Orders" only and with Longer Lead Times

High Performance LED Omni-Cob Lamp, 16W

Photometrics

The Diameter indicates the illuminated Area and the Average illumination when the Lamp is installed at Different Heights.

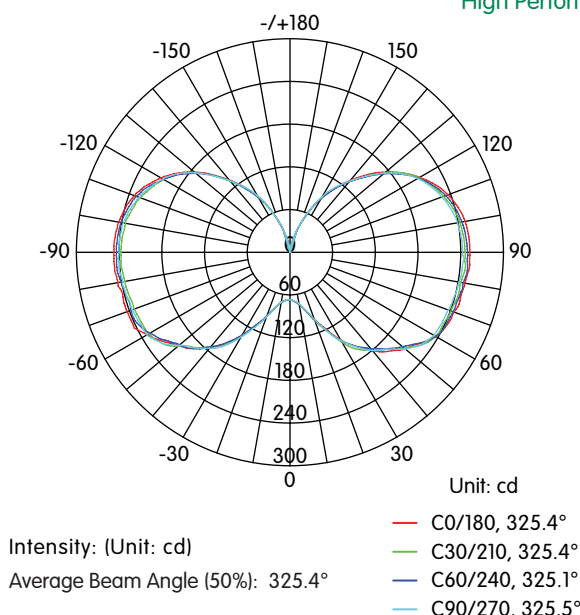

Flux Out: 255 lm			
Height	EAvg/EMax	Angle: 90.0°	Diameter
1 m (3.3 ft.)	81.1/95.0 lx (7.5/8.8 fc)		2.0 m (6.6 ft.)
2 m (6.6 ft.)	20.3/23.8 lx (1.9/2.2 fc)		4.0 m (13.1 ft.)
3 m (9.9 ft.)	9.0/10.6 lx (0.8/1.0 fc)		6.0 m (19.7 ft.)
4 m (13.1 ft.)	5.1/5.9 lx (0.5/0.55 fc)		8.0 m (26.3 ft.)
5 m (16.4 ft.)	3.3/3.8 lx (0.3/0.35 fc)		10.0 m (32.8 ft.)
6 m (19.7 ft.)	2.3/2.6 lx (0.21/0.24 fc)		12.0 m (39.4 ft.)
7 m (23.0 ft.)	1.7/1.9 lx (0.16/0.18 fc)		14.0 m (45.9 ft.)
8 m (26.3 ft.)	1.3/1.5 lx (0.12/0.14 fc)		16.0 m (52.5 ft.)
9 m (29.5 ft.)	1.0/1.2 lx (0.09/0.11 fc)		18.0 m (59.0 ft.)
10 m (32.8 ft.)	0.8/1.0 lx (0.7/0.09 fc)		20.0 m (65.6 ft.)

Ideal for high-quality illumination in:

- Area Lighting
- Flood Lighting
- Pendant Lights
- Jelly Jar Lights
- Globe Fixtures
- Wall Packs
- Wall Scones
- Security Lighting
- Decorative Lighting
- Parking Lot
- Accent Lighting
- Task Lighting
- Industrial Beacons
- Explosion-proof Fixtures
- Freezer & Cold Storage Lights
- Driveway & Walkway Lighting
- Historic/Vintage Fixtures
- Low Bay Lighting



WARNING!

Minimum Lamp Compartment Size
6" x 6" x 8.5" (152mm x 152mm x 216mm)

Installation: HyLite LED Lamps are designed to Work off 100V to 277V, AC. Ballast (if equipped) must be Bypassed or Removed from the Fixture before installing the Lamp. Eliminating the Ballast saves additional costs related to Maintenance, Energy Consumption and Performance. By-passing Ballast will also ensure that there is no EMI/RF interference. It is **STRONGLY RECOMMENDED** that the Reflector in the Fixture be removed for Optimum Thermal Management and better Heat Dissipation. This will ensure Lumen Maintenance and extend its Working Life.

Failure to follow these Instructions will result in a Damaged Product and will VOID Warranty. It could also result in an Electric Shock, or Fire.

Warning - Risk of Fire or Electric Shock

- Disable all Power to the Lamp before Inspection, Installation, or Removal. Failure to do so will create a Hazardous and Fatal Working Environment.
- Suitable for use in Dry and Damp Locations. Lamp must be installed in accordance with National, State, and/or Local Electrical Codes. Do Not Open – No User Serviceable Parts Inside.
- Operate in Fixtures that provide the Free Flow of Air around the Lamp Heat Sink. In Enclosed Fixtures, ensure the Lamp has enough Space for Heat Dissipation. This will ensure Lumen Maintenance and extend its Working Life. When products are used in Outdoor Fixtures, ensure the space is Waterproof and Well Ventilated.
- Not for use on a Dimmer or Remote Controls. This Lamp must be controlled only by either a Switch or an Electronic Photosensor. Do not use a Mechanical Sensor.
- Not intended for use with Emergency Exit Fixtures or Emergency Exit Lights.
- Caution: When Installing Lamps in Corrosive Environments, HyLite suggests that a High-Temperature, Moisture-Resistant, Silicone Grease or Sealant be used to protect the Metal-threaded Base of the LED Lamp to prevent Water and/or Moisture Incursion that can lead to Premature Degradation of the Lamp Base and eventual Lamp Failure. This is especially recommended for LED Lamp installations near Saltwater Bodies.
- Installing Surge/Lightning Protectors is Highly Recommended and helps to Eliminate Premature Driver Failure caused by Surges and Power Fluctuations.