

Ideal for High-quality Illumination in:

- Down Lights
- Wall Scones
- Wall Packs
- Decorative Lighting
- Accent Lighting
- Ceiling Lights
- Pendant Lights
- Walkway Lighting
- Task Lighting
- Stairwell Lighting
- Corridor Lighting
- Carriage Lanterns


High Performance 12W LED VL Lamp

The HyLite High Performance LED VL Lamp is an ideal Energy-Efficient replacement for CFL and Incandescent Bulb installations in Existing and New Fixtures. The 12W LED VL Lamp provides Energy-Efficient Illumination at a Wide Beam Angle of 120° and replaces 26W/32W/42W CFL Bulbs, effectively reducing Energy Consumption by 54%-63%-72% and as much as 90% when replacing 120W Incandescent Bulbs. HyLite LED VL Lamps are rated at up to 50,000 hours of Lamp Life. This is 50 times longer than a traditional Incandescent Bulb, and 7 times longer than a CFL Bulb. This significantly reduces Energy Usage and Costs as well as Maintenance Expenditures.

- Easy Installation & Retrofitting: Simply Bypass Ballast and Plug-in. Runs on AC Direct Line Voltage. Eliminates Compatibility, Power Loss & Lifetime Issues and Maintenance Costs associated with Ballasts
- Full Brightness with Instant On and Instant Restrike
- Optimal Design for Horizontal Mount Sockets
- >80 CRI for Great Visibility
- Suitable for Dry or Damp Location
- Low Power Consumption
- Universal Voltage: 100-277V, AC
- Heat & Impact Resistant, UV Protected, Non-Yellowing, Optical Grade Lens
- Excellent Heat Dissipation with Proprietary-Designed Heat Sink
- Cool Operation: Does not add to Heat Load (up to 90% less heat than Incandescent) while producing Brilliantly Bright Light
- Non-Combustible. Made from Flame Retardant, Engineered Polymer, the Base is Mechanically Strong and Heat-Resistant up to 435°F (225°C)
- Safe and Reliable: Isolated Circuit Design
- Maintenance-Free Operation: Lasts up to 50 times longer than Incandescent Bulb. Lowers Costs by Reducing Relamp Frequency
- Safe: Contain No Hazardous Materials; RoHS Compliant: No Lead, Mercury, Toxic Metals or Arsenic Gases. No Disposal Requirements. Facilitates LEED® points
- No Electro-Magnetic (EMI) or Radio Frequency Interference (RFI)
- Environmentally Friendly: 98% of the HyLite LED Lamp is Recyclable

Not Suitable for Enclosed Fixtures

26W / 32W / 42W
CFL Equivalent

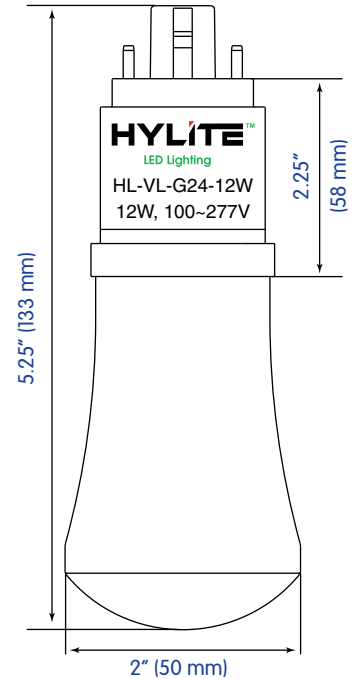

NO
LEAD, MERCURY,
HEAVY METALS
OR TOXIC GASES



Incandescent	Halogen	CFL	HyLite
120W	75W	26W / 32W / 42W	12W
90%	84%	54%-63%-72%	Energy Savings (%)

Replace with

HyLite LED PL lamps offer a truly Universal G24 Base - designed to replace both 2-pin and 4-pin G24 Bases listed:

G24d	G24q	Gx24d	Gx24q
G24d-1	G24q-1	Gx24d-2	Gx24q-1
G24d-2	G24q-2	Gx24d-3	Gx24q-2
G24d-3	G24q-3		Gx24q-3
			Gx24q-4

<p>Longer Life</p> <p>Up to 50,000 Hours</p> <p>Increased Sustainability</p>	<p>Energy Costs</p> <p>Reduction of up to 90%</p>	<p>Power</p> <p>Low Consumption</p>	<p>Beam Angle</p> <p>Wide and Uniform</p>	<p>Lumen Efficacy</p> <p>110 LpW LM-79 Tested</p>	<p>No IR/UV</p> <p>Radiation-Free No Humming</p>	<p>No EMI / RFI</p> <p>Zero Interference</p>	<p>Solid State</p> <p>Vibration and Shock Resistant</p>	<p>Reliability</p> <p>LM-80 Tested ISTMT Tested</p>	<p>Warranty</p> <p>5 years</p> <p>Reliable and Long-Lasting</p>
---	--	--	--	--	---	---	--	--	--



As part of the company's continuous product improvement program, HyLite reserves the right to change materials or modify the design of its product without notification. All Specifications subject to change without notice. All values are design and/or typical values when measured under laboratory conditions. Actual Values depend upon the ambient temperature of the installation location. Please consult factory for your specific requirements.

Model No.	Watts	Delivered Lumens	Input Line Current	Dimensions & Weight (each)		
				Width	Height	Net Weight
HL-VL-G24-12W	12	1248	97mA@120V	2" (50mm)	5.25" (133mm)	2.65 oz. (75g)

- Efficacy: 110 lpW
- Power Factor: >0.9
- Ambient Working Temperature: -4°F~+104°F (-20°C~+40°C)
- CCT: 3500K (Neutral White) and 4000K (Cool White)
- * Depending upon the ambient temperature of the installation location
- CRI: >80
- Protection: IP20
- Beam Angle: 120°
- Rated Life: 50,000 Hrs.*
- Max. THD (%): <10%
- Warranty: 5 Years
- Base Type: G24
- Universal Input Voltage: 100~277V, AC 50/60 Hz.

WARNING
Not Suitable for Totally Enclosed Luminaires or Fully Enclosed Fixtures

HyLite VL Lamp, HL-VL-G24-12W Photometrics

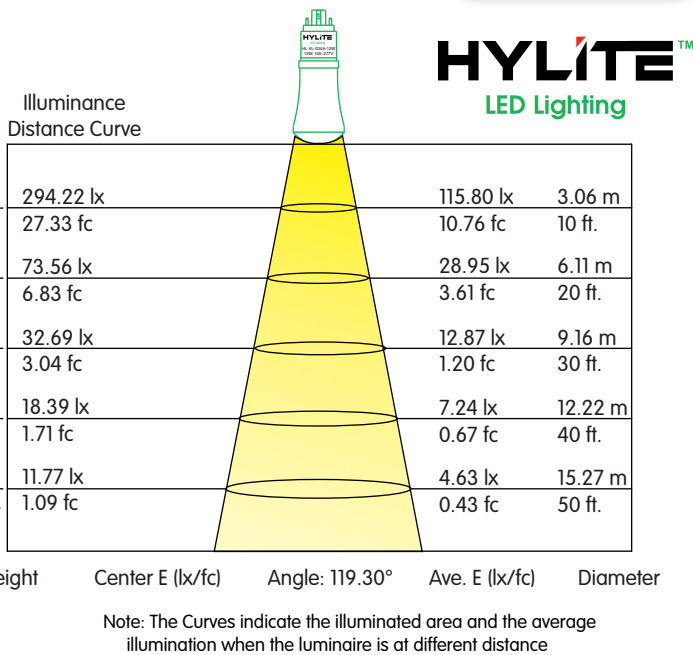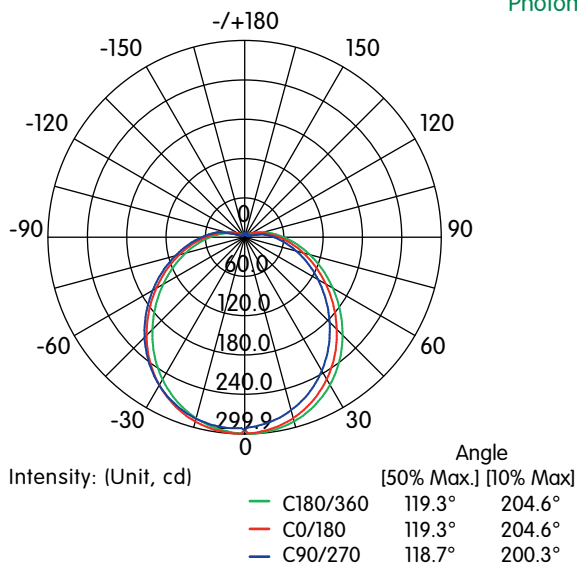

Ordering for HyLite 12W LED VL Lamp with G24 Base

Model	Suffix	(CCT, °K)
HL-VL-G24-12W	-35K	3500K = Neutral White (NW)
	-40K	4000K = Cool White (CW)

Warning: Disable all Power to the Luminaire. HyLite LED VL Lamps are Designed to work off 100V~277V, AC. HyLite 12W LED VL Lamps are not Compatible with Electronic Ballasts. Electronic Ballast (if equipped) must be Bypassed or removed from the Luminaire before installing the Lamp. Failure to Follow Instructions will VOID Warranty. It can also result in an Electric Shock, or Fire. NOT FOR TOTALLY ENCLOSED LUMINAIRES OR EMERGENCY LIGHTING. NOT FOR USE WITH DIMMERS.

Warning – Risk of Fire or Electric Shock

- For use in Dry or Damp Locations. Do not use where directly exposed to Liquid, Vapor, Rain or Weather. Non-Submersible (not water tight).
- Operate in Fixtures that provide the free flow of air around the Lamp. This will ensure Lumen Maintenance and Extend Its Working Life. When Products are used in Outdoor Fixtures, ensure the space is Waterproof and Well-Ventilated.
- The Installer must determine and verify whether 120V to 277V AC is being utilized at the Luminaire before Installation. Improper Voltage matching can result in Performance Degradation and/or Physical Damage. These Lamps work on Line Voltage and require all Ballasts and Starters to be Bypassed.
- Wiring modification for HyLite LED Lamp Installation requires knowledge of Luminaire Electrical Systems. If not qualified, DO NOT attempt Installation. Contact a Qualified Electrician.
- Luminaire Wiring, Ballast, or other Electrical Parts may be Damaged when Installing. Always check for enclosed Wiring and Components.
- To prevent Wiring Damage or Abrasion, DO NOT expose Wiring to edges of Sheet Metal or other Sharp Objects.
- DO NOT Make or Alter any Open Holes in an Enclosure for Wiring or Electrical Components during Installation.
- DO NOT Block Light emanating from Product in Whole or Part, as this may Cause an Unsafe Condition.
- Installing Surge/Lightning Protectors is Highly Recommended and helps to Eliminate Premature Driver Failure caused by Surges and other Power Fluctuations.
- The End Retrofit Fixture, once Modified, can No Longer Operate as was Originally Intended.