



Ideal for High-quality Illumination in:

- Down Lights
- Wall Scones
- Wall Packs
- Decorative Lighting
- Accent Lighting
- Ceiling Lights
- Pendant Lights
- Walkway Lighting
- Task Lighting
- Stairwell Lighting
- Corridor Lighting
- Carriage Lanterns

18W / 26W / 32W
CFL Equivalent



High Performance 10W LED Plug & Play Dimmable Omni-Bulb

Ballast Compatible Type A

The Hylite High Performance LED Plug & Play Dimmable Omni-Bulb is an ideal Energy-Efficient replacement for CFL & Incandescent Bulb installations in Existing & New Fixtures. The 10W Hylite LED Plug & Play Dimmable Omni-Bulb provides 360° Energy-Efficient Illumination and replaces 18W/26W/32W CFL Bulbs, effectively reducing Energy Consumption by 44%-62%-69%, and as much as 90% when replacing 100W Incandescent Bulbs. Hylite LED Omni-Bulbs are rated up to 50,000 hours of Lamp Life. This is 50 times longer than a traditional Incandescent Bulb, and 7 times longer than a CFL Bulb. This significantly reduces Energy Usage and Costs as well as Maintenance Expenditures.

- Simply Plug & Play: Ballast Compatible (*Check the Ballast Compatibility List on last page*). No Wiring Change Necessary.
- Full Brightness with Instant On and Instant Restrike
- Optimal Design for Horizontal or Vertical Mount Sockets
- >80 CRI for Great Visibility
- Suitable for Dry or Damp Location
- Universal Voltage: 100-277V, AC
- Heat & Impact Resistant, UV Protected, Non-Yellowing, Optical Grade Lens
- Cool Operation: Does not add to Heat Load (up to 90% less heat than Incandescent) while producing Brilliantly Bright Light
- Non-Combustible. Made from Flame Retardant, Engineered Polymer, the Base is Mechanically Strong and Heat-Resistant up to 435°F (225°C)
- Safe and Reliable: Isolated Circuit Design
- Maintenance-Free Operation: Lasts up to 50 times longer than Incandescent Bulb. Lowers Costs by Reducing Relamp Frequency
- Safe: Contain No Hazardous Materials; RoHS Compliant: No Lead, Mercury, Toxic Metals or Arsenic Gases. No Disposal Requirements. Facilitates LEED® points
- No Electro-Magnetic (EMI) or Radio Frequency Interference (RFI)
- Environmentally Friendly: 98% of the Hylite LED Lamp is Recyclable

Not Suitable for Enclosed Fixtures

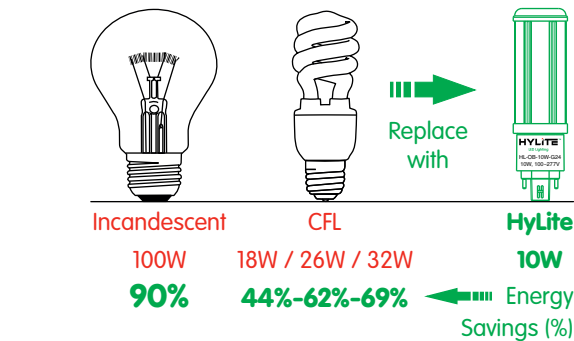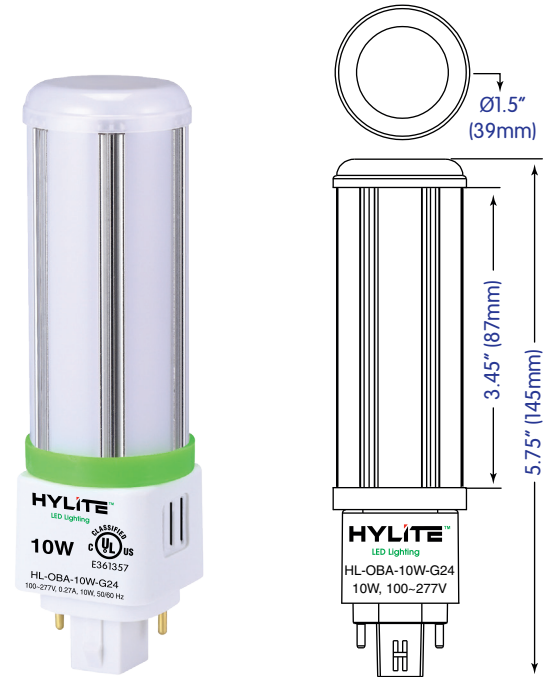

98% RECYCLABLE



NO

LEAD, MERCURY, HEAVY METALS OR TOXIC GASES



Universal Burning Positioning

Lamp can be oriented in any position - does not affect or diminish the life of the lamp



<p>Longer Life</p> <p>Up to 50,000 Hours</p> <p>Increased Sustainability</p>	<p>Energy Costs</p> <p>Reduction of up to 90%</p>	<p>Power</p> <p>Low Consumption</p>	<p>Beam Angle</p> <p>360° Illumination</p>	<p>Lumen Efficacy</p> <p>75 LpW LM-79 Tested</p>	<p>No IR/UV</p> <p>No Noise</p> <p>Radiation-Free No Humming</p>	<p>No EMI / RFI</p> <p>Zero Interference</p>	<p>Solid State</p> <p>Vibration and Shock Resistant</p>	<p>Reliability</p> <p>LM-80 Tested ISTMT Tested</p>	<p>Warranty</p> <p>5 years</p> <p>Reliable and Long-Lasting</p>
---	--	--	---	---	---	---	--	--	--

HYLITE™

LED Lighting

LED

OMNI-BULB™

Ballast Compatible Type A

As part of the company's continuous product improvement program, HyLite reserves the right to change materials or modify the design of its product without notification. All Specifications subject to change without notice. All values are design and/or typical values when measured under laboratory conditions. Actual Values depend upon the ambient temperature of the installation location. Please consult factory for your specific requirements.

Model No.	Watts	Delivered Lumens*	Input Line Current	Dimensions and Weight (each)		
				Width	Height	Net Weight
HL-OBA-10W-G24	10	750	36~100mA	1.5" (39mm)	5.75" (145mm)	6 oz. (170g)


- Minimum Lamp Compartment Dimensions for Enclosed Fixtures: 6" x 6" x 8.5" (152mm x 152mm x 216mm)
- To Prevent early Lamp Failure, Lamp should only be installed in Operating Environments ranging from a Minimum of -20°C (-4°F) to a Maximum of +45°C (113°F)
- Efficacy: 75 LpW*
 - CRI: >80
 - Beam Angle: 360°
 - Max. THD (%): <7%
- Power Factor: >0.98
 - Protection: IP20
 - Rated Life: 50,000 Hrs.*
 - Warranty: 5 Years
- Ambient Working Temperature: -4°F~+113°F (-20°C~+45°C)
 - Base Type: G24
 - Universal Input Voltage
- CCT: 3500K (Neutral White), 4000K (Cool White) and 5000K (DayLight).
 - 100~277V, AC 50/60 Hz.

WARNING
Not Suitable for Totally Enclosed Luminaires or Fully Enclosed Fixtures

* Depending upon Ballast

** Depending upon the ambient temperature of the installation location

HyLite LED Dimmable Omni-Bulb, HL-OBA-10W Photometrics

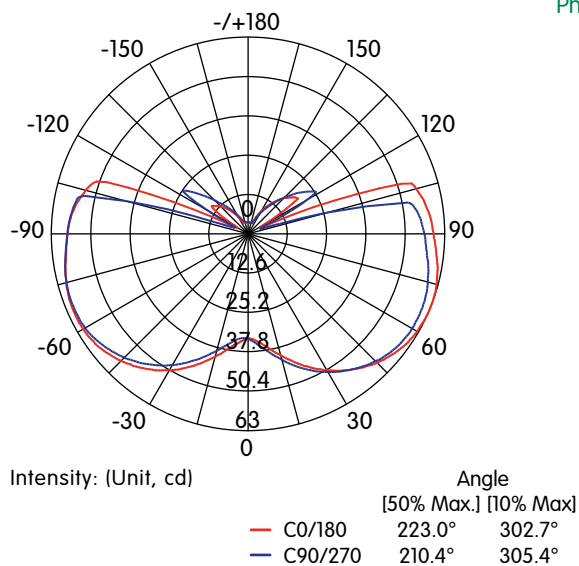

HYLITE™

LED Lighting

Illuminance Distance Curve

Height	Center E (lx/fc)	Angle: 223.0°	Diameter
1 m	33.51 lx		3.06 m
3.3 ft.	3.11 fc		10 ft.
2 m	8.38 lx		6.11 m
6.5 ft.	0.78 fc		20 ft.
3 m	3.72 lx		9.16 m
9.8 ft.	0.35 fc		30 ft.
4 m	2.09 lx		12.22 m
13.1 ft.	0.19 fc		40 ft.
5 m	1.34 lx		15.27 m
16.4 ft.	0.12 fc		50 ft.

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance

Ordering for HyLite 10W LED Omni-Bulb with G24 Base

Model / Base	Nominal Color Temperature (CCT, °K)
HL-OBA-10W-G24	-35K 3500K = Neutral White (NW)
	-40K 4000K = Cool White (CW)
	-50K 5000K = DayLight (DL)

Not Suitable for Enclosed Fixtures

Warning: Disable all Power to the Luminaire. HyLite LED Omni-Bulbs are designed to work off 100V~277V, AC. HyLite 10W LED Omni-Bulbs are compatible with Electronic Ballasts. See Ballast Compatible List.

The installer **MUST** ensure and verify that **NO Part** of the installed LED Lamp should touch the Fixture Housing or Components.

Failure to Follow Instructions will VOID Warranty. It can also result in an Electric Shock, or Fire. NOT FOR TOTALLY ENCLOSED LUMINAIRES OR EMERGENCY LIGHTING. NOT FOR USE WITH DIMMERS.

Warning – Risk of Fire or Electric Shock

- Disable all Power to the Lamp before Inspection, Installation, or Removal. Failure to do so will create a Hazardous and Fatal Working Environment. The Installer must determine and verify whether 120V to 277V AC is being utilized at the Luminaire before Installation. Improper Voltage matching can result in Performance Degradation and/or Physical Damage.
- Wiring modification for HyLite LED Lamp Installation requires knowledge of Luminaire Electrical Systems. If not qualified, DO NOT attempt Installation. Contact a Qualified Electrician. DO NOT Make or Alter any Open Holes in an Enclosure for Wiring or Electrical Components during Installation.
- Suitable for use in Dry or Damp Locations. Do not use where directly exposed to Liquid, Vapor, Rain or Weather. Non-Submersible (not water tight). Lamp must be installed in accordance with National, State, and/or Local Electrical Codes. Do Not Open – No User Serviceable Parts Inside.
- To prevent early Lamp failure, Lamp should only be installed in Operating Environments ranging from a minimum of -20°C (-4°F) to a maximum of +45°C (113°F).
- Luminaire Wiring, Ballast, or other Electrical Parts may be Damaged when Installing. Always check for enclosed Wiring and Components. DO NOT Block Light emanating from Product in Whole or Part, as this may Cause an Unsafe Condition. To prevent Wiring Damage or Abrasion, DO NOT expose Wiring to edges of Sheet Metal or other Sharp Objects.
- Operate in Fixtures that provide the Free Flow of Air around the Lamp Heat Sink. In Enclosed Fixtures, ensure the Lamp has enough Space for Heat Dissipation. This will ensure Lumen Maintenance and extend its Working Life. When products are used in Outdoor Fixtures, ensure the space is Waterproof and Well Ventilated.
- Not for use on a Dimmer or Remote Controls. This Lamp must be controlled only by either a Switch or an Electronic Photosensor. Do not use a Mechanical Sensor.
- Not intended for use with Emergency Exit Fixtures or Emergency Exit Lights.
- Installing Surge/Lighting Protectors is Highly Recommended and helps to Eliminate Premature Driver Failure caused by Surges and Power Fluctuations.

The List below is based in part on information provided by the Ballast Manufacturer and Testing was done on a stable AC Power Supply under Laboratory Conditions, which may or may not be representative of your particular End-use Conditions. Applications and Conditions of use are many and varied and beyond our control, so purchasers and users should make their own determinations as to the suitability of a Lamp-Ballast combination for their own particular Application and Use. Compatibility may also extend to Ballasts beyond this list, so performing an On-Site Test before Installation is Strongly Recommended.

 **Compatible**  **Not Compatible**

Ballast Model	One Lamp		Two Lamp	
	120V	277V	120V	277V
Advance ICF-2S26-M1-BS	Compatible	Compatible	Compatible	Compatible
Advance ICF-2S26-H1-LD	Compatible	Compatible	Compatible	Not Compatible
Advance ICF-2S13-H1-LD	Compatible	Compatible	Compatible	Compatible
Advance ICF-2S18-H1-LD	Compatible	Compatible	Compatible	Compatible
Advance ICF-2S18-M1-BS	Compatible	Compatible	Compatible	Compatible
Advance IZT-2S26-M5-LD	Compatible	Compatible	Compatible	Compatible
Advance ICF-2S26-M1-BS-QS	Compatible	Compatible	Compatible	Compatible
GE Proline GEC226-MVPS-BES	Compatible	Compatible	Compatible	Compatible
GE Proline GEC226-MVPS-3W	Compatible	Compatible	Compatible	Compatible
GE Proline GEC226-MVPS-SE	Compatible	Compatible	Compatible	Compatible
GE GEC218-MVPS-3W	Compatible	Compatible	Compatible	Compatible
GE GEC218-MVPS-BES	Compatible	Compatible	Compatible	Compatible
GE GEC213-MVPS-3W	Compatible	Compatible	Compatible	Compatible
Hatch HC213PS/UV/D	Compatible	Compatible	Compatible	Compatible
Hatch HC226PS/UV/D	Compatible	Compatible	Compatible	Compatible
Howard EP2/18CF/MV/2	Compatible	Compatible	Compatible	Compatible
Howard EP2/26CF/MV/2	Compatible	Compatible	Compatible	Compatible
LumaPro 4KGJ7	Compatible	Compatible	Compatible	Compatible
LumaPro 16X954	Compatible	Not Compatible	Compatible	Compatible
LumaPro 16X959	Compatible	Compatible	Compatible	Compatible
LumaPro 4KGJ8	Compatible	Not Compatible	Compatible	Compatible
Robertson PSM226CQMVDWCE	Compatible	Not Compatible	Compatible	Compatible
Sylvania QTP 2x26CF/UNV S PEM	Compatible	Not Compatible	Compatible	Compatible
Sylvania QTP 2X26CF/UNV DM	Compatible	Compatible	Compatible	Compatible
Sylvania QTP 1/2x18CF UNV DM	Compatible	Compatible	Compatible	Compatible
Triad C2642UNVSE	Compatible	Compatible	Compatible	Compatible
Triad C2642UNVME	Compatible	Compatible	Compatible	Compatible
Triad C218UNVME	Compatible	Compatible	Compatible	Compatible

HyLite HyLite LED "Type A" Plug-in Lamps and Omni-Bulbs have been tested for compatibility to work flawlessly with the Ballasts shown above. HyLite is continually testing "Type A" Plug-in Lamps and Omni-Bulbs on various other Ballasts. We will continue to update the Ballast Compatibility List as additional models are tested. Please contact HyLite about any Ballasts not shown on this list.

Note: Risk of Fire or Electric Shock. Before Installation, check Specifications for the most Current Ballast Compatibility List. If the Ballast model does not appear on this List, please DO NOT Install, until you check with HyLite. Installing HyLite LED "Type A" Plug-in Lamps and Omni-Bulbs without verifying it against the Ballast Compatible List and without testing the Compatibility will void all Warranties. Read and Understand all Installation Instructions before installing HyLite LED "Type A" Plug-in Lamps and Omni-Bulbs.